



Coin-operated

Stack Hardmount Washer Extractor
& Economy Tumble Dryer

SHDC Series
MODEL : SWDC-2030

SPECIFICATION

Standard Features :

WASHER:

- Advanced Microcomputer & Coin Controller System
- Programmable Water Temperature
- 90 G Extraction Force
- 3 Compartment Supply Dispensers on Top
- Built-in Vacuum Breaker
- 4 Connections & Flush for Central Liquid Chemical Supply.
- All part in contact with wash solution made of 304 (18/8) Stainless steel.
- External Hot Water Supplied, Prepared For Direct Steam Connection.
- Single Rear Drain Connection.
- Single Motor Inverter Driven – Programmable
- Variable Speed.
- Robust Gamma A-Frame
- 3 Water Levels (L, M, H)

DRYER:

- Micro Computer & Coin Controller System
- Four Fixed Temperatures (L, M, H)
- Galvanized Basket (Basket Flat)
- Ball Bearing
- Durable Mark Resistant Powder Coated Cabinet
- Heavy Duty Ridged Frame.
- Large Door Opening For Easy Loading
- Poly-V Belt

Optional Features :

WASHER:

- Full Stainless Steel Cabinet Front & Sides
- Direct Steam Heating
- Electrical Heating
- EMI Filter for CE
- Special Voltage Modifications

DRYER:

- Stainless Steel Basket
- Stainless Steel Front Cabinet
- Full Stainless Steel Cabinet Front & Sides
- Energy-Saving Insulation
- Stainless Steel Lint Filter
- Gas Conversion Kit LPgas or Natgas
- Special Voltage Modifications

Colors Available :



White Silver Blue Orange

MODEL			SHDC-2030
Unit of Measurement	Metric	US	
Capacity:			
Washer Capacity	kg.	lbs.	9.1 (20)
Dryer Capacity	kg.	lbs.	13.6 (30)
Overall Dimensions:			
A - Machine Width	mm.	inch	800 (31.5")
B - Machine Depth	mm.	inch	1072 (42.2")
C - Machine Height	mm.	inch	1976 (77.8")
Cylinder Information:			
Washer Basket Diameter	mm.	inch	610 (24.0")
Washer Basket Depth	mm.	inch	345 (13.6")
Washer Basket Volume	cu.m.	cu.ft.	0.11 (4)
Dryer Basket Diameter	mm.	inch	305 (12")
Dryer Basket Depth	kg	ibs	596 (1254.4)
Dryer Basket Volume	cu.m.	cu.ft.	0.3 (10.59)
Drive Information:			
Number of Motor (Washer)	Number		1
Size of Motor (Washer)	kW	HP	0.75 (1)
Number of Motor (Dryer)	Number		2
Size of Motor (Dryer)	kW	HP	0.18 (0.25)
Size of Blower Motor (Dryer)	kW	HP	0.37 (0.5)
Cylinder Speed:			
Wash (Washer)	RPM	G-Force	48.5 (0.8)
Distribution (Washer)	RPM	G-Force	76.5 (2)
Extract (Washer)	RPM	G-Force	570 (111)
Speed (Dryer)	RPM	G-Force	45
Washer requirements:			
Water Inlets & Consumption:			
Hot Water Size	NPT		3/4"
Cold Water Size			
Additional Water Inlet			
Average HOT Water Consumption/ Cycle	liters	gal	91 (24)
Average COLD Water Consumption/ Cycle	liters	gal	174 (46)
Drain Outlets & Capacity:			
Number of Drain	Number		1
Drain Size	mm.	inch	50.8 (2")
Drain Capacity	liters/min	gpm	117 (31)
Steam Inlet & Consumption:			
Steam Inlet Connection	NPT		1/2"
Steam Pressure	bar	Psi	6 (100)
Steam Consumption	kg/hr	ib/hr	11 (24.15)
Power of Electrical Heating:			
Electrical Heating Power	kW		9
Dryer requirements:			
Gas Model:			
Air Flow	cmm.	cfm	17 (600)
Gas Consumption	kcal/hr	btr/hr	37828.5 (155000)
Gas Inlet Connection	NPT		1/2"
Exhaust Duct Connection	mm.	inch	140 (5.5")
Weight & Shipping Information:			
Net Weight (approx.)	kg	ibs	Consult factory
Shipping Weight (approx.)	kg	ibs	Consult factory

Specification of design is subject to change without notice. For additional options please consult factory and distributor.



ISO 9001 : 2015




ISO 14001 : 2015



ISO 13485 : 2016

ACCURATE TECHNOLOGIES CO., LTD.
Bangkok, Thailand Phone : +66(0)2740-5511 (Auto) Fax : +66(0)2752-2773
Website : www.imagelaundrysystems.com Email : sales@accuratethai.com

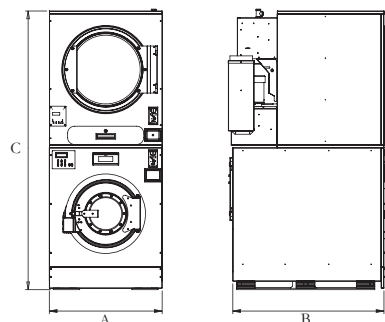

Rev. 2019-000