



PROFESSIONAL HEATED ROLL IRONERS



MODEL : Aero-Tech RP18120, Aero-Tech RP24120, Aero-Tech RP32120



**Professional Economy Heated Roll Ironers
for General Laundry Applications
High Quality Standard of Finished Linen**

Specification

MODEL			Aero-Tech RP18120	Aero-Tech RP24120	Aero-Tech RP32120
Units of Measurement	Metric	US			
Number of Rolls	Roll		1	1	1
Roller Diameter	mm.	inch	457.2(18")	609.65(24")	812.8(32")
Working Width	mm.	inch	3000(118.1")	3000(118.1")	3000(118.1")
Speed Range	M/min	Ft/min	30012.5-14 (8-45)	30013.75-22 (12-72)	30014.5-30 (15-98)
Overall Dimensions :					
A - Machine Width	mm.	inch	4060(159.8")	4060(159.8")	4060(159.8")
B - Machine Depth	mm.	inch	1297(51.5")	1592(62.7")	1804(71")
C - Machine Height at full	mm.	inch	2418(95.2")	2443(96.2")	2621(103.2")
D - Canopy Height	mm.	inch	500(19.7")	500(19.7")	500(19.7")
Drive System :					
Drive Motor	kW	HP	0.75(1)	1.10(1.5)	2.2(3)
Delivery Motor	kW	HP	0.25(0.33)	0.25(0.33)	0.25(0.33)
Blower Motor	kW	HP	1.5(2)	1.5(2)	1.5(2)
Power System :					
Power Source	V / Hz / Ph		220/380/415 V / 50 Hz / 3 Ph 208-220/440/460 V / 60 Hz / 3Ph		
Compressed Air System :					
Air Flow	Cmm	Cfm	50 (1764.9)	50 (1764.9)	50 (1764.9)
Exhaust Duct	mm.	inch	254(10)	254(10)	254(10)
Gas Model :					
Gas Inlet Connection	NPT		1"	1"	1"
Gas Consumption	kcal/hr	btu/hr	31272(140267)	45833(181962)	69056(229662)
Net Weight	kg.	lbs.	1730(3814)	2532(5582)	2852(6288)
Domestic Shipping Weight (approx.)	kg.	lbs.	1865(4112)	2667(5880)	2987(6585)
Steam Model :					
Steam Inlet Connection	NPT		3/4"	1-1/4"	1-1/4"
Steam Outlet Connection			1/2"	3/4"	3/4"
Steam Pressure	bar	psi	6.2-8.6 (90-125)	6.2-8.6 (90-125)	6.2-8.6 (90-125)
Steam Consumption	kg/hr	lb/hr	68.86(151.8)	93.9(207)	125.2(276)
Net Weight	kg.	lbs.	1783(3931)	2585(5699)	2905(6404)
Domestic Shipping Weight (approx.)	kg.	lbs.	1917(4226)	2720(5997)	3040(6702)
Electric Heated Model :					
Electrical Heating Power	kW		36	48	N/A
Net Weight	kg.	lbs.	1843(4063)	2645(5831)	N/A
Domestic Shipping Weight (approx.)	kg.	lbs.	1973(4350)	2780(6129)	N/A

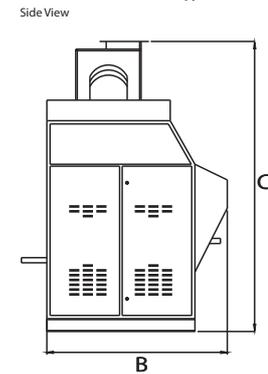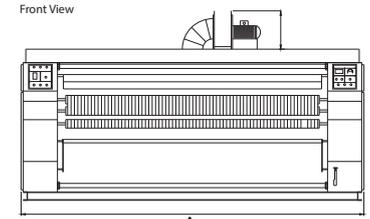

Specification of design is subject to change without notice. For additional options please consult factory and distributor.

Standard Features :

- Gas heated models for Natural or LP gas
- Variable speed drive with inverter
- Electronic temperature control with digital read out
- Jog forward/reverse
- Front or rear return Exhaust canopy with external blower
- Electrical and mechanical protection devices
- Three phase electrical service
- Chrome plated cylinder
- Lift of interlocked end panels for easy maintenance
- Emergency stop buttons

