Image
Laundry Systems

AMFOLD

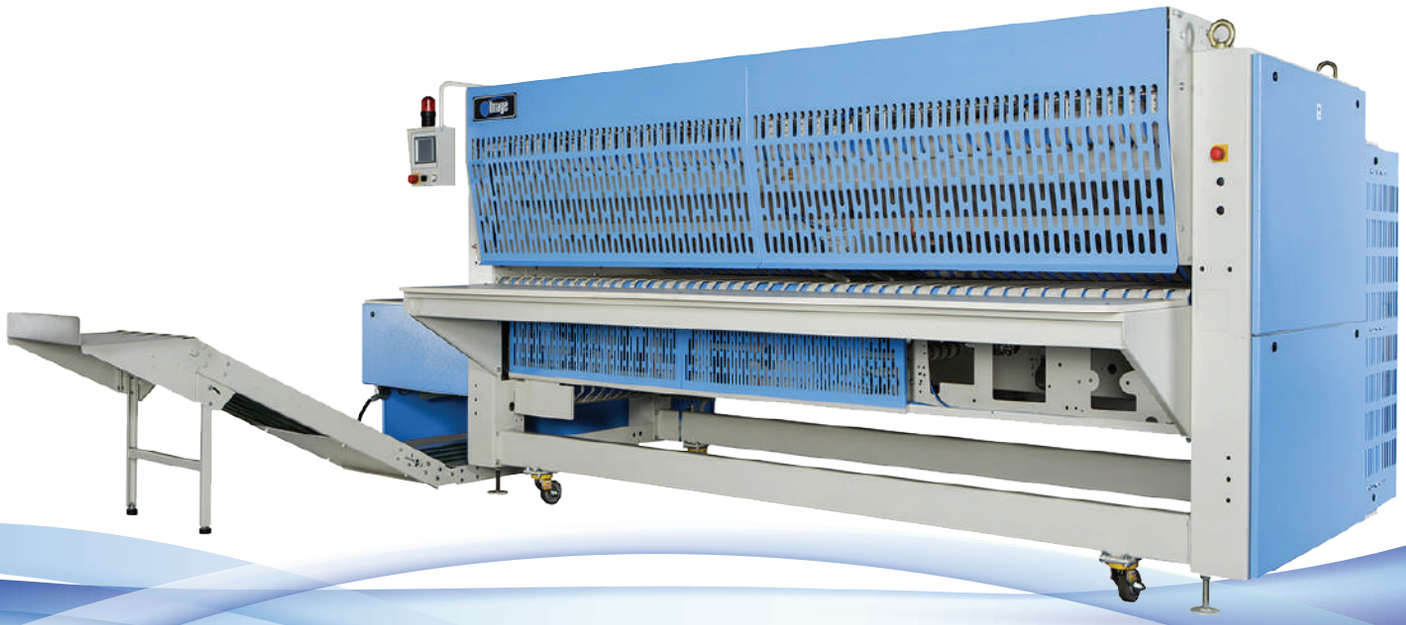

Amfold-E
with Amstack C, D

Up to 1800 pieces/hour
Compact
Touch screen panel
All cross folds timing belt driven
Easy access

SPECIFICATION

Standard Features : Amfold-E

Amfold-E (without Stacker)

- Single lane
- 2 Primary folds
- Up to 3 cross folds
- Automatic operation
- Program control from Feeder
- Able to connect with any Ironer
- Photocells face down without mirror
- Several cross fold combinations available
- PLC touch screen
  - Pneumatic folding
  - Standard Ethernet connection
  - Programmable for different types of linen
  - Counting linen in each lane, linen folds per day
  - USB stick connection for backing up of settings

Available Options : Stacker

- Amstack-C : Stack and fold
- Amstack-D : Drop stacker

MODEL			AMFOLD-E (3300 mm.)
Units of Measurement	**Metric**	**US**	
Working width	mm.	inch	3300 (129.9)
Speed Range	M/min	Ft/min	5-50 (16-164)
Overall Dimensions :			
A - Machine Width	mm.	inch	4511 (177.6”)
B - Machine Depth	mm.	inch	2935 (155.6”)
C - Machine Height	mm.	inch	1715 (67.5”)
Production Materials :			
Large pieces (1 lane)			
- Maximum Size :	mm.	inch	3300 (129.9)
- Minimum Size :	mm.	inch	900 (35.4)
Small pieces (Multilane)			
- Maximum Size :	mm.	inch	1300 (51.2)
- Minimum Size :	mm.	inch	400 x 250 (15.7 x 9.8)
Drive System :			
Main Drive Motor	kW	HP	1.25 - 2.0 (1.7 - 2.7)
Fuse	Amp		10
Power System :			
Power Source	V / Hz / Ph		220/380/415 V / 50 Hz / 3 Ph 208-220/440/460 V / 60 Hz/ 3Ph
Compressed Air System :			
Air Inlet Connection	mm.	inch	12.7 (1/2)
Air Pressure	bar	psi	6-10 (87-145)
Air consumption	nL/hr		20000
Miscellaneous :			
Noise Level	dBA		75
Weight and Shipping Information :			
Net Weight (approx.)	kg.	lbs.	1800 (3968)
Domestic Shipping weight (approx.)	kg.	lbs.	1950 (4299)

Specification of design is subject to change without notice. For additional options please consult factory and distributor.

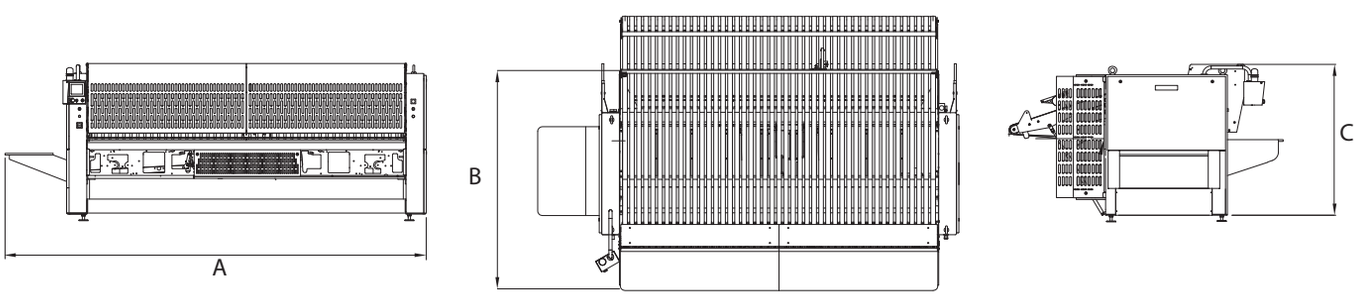

ISO 13485 : 2016 ISO 9001 : 2015 ISO 14001 : 2015 ISO 45001 : 2018

ACCURATE TECHNOLOGIES CO., LTD.
Bangkok, Thailand Phone : +66(0)2740-5511 (Auto) Fax : +66(0)2752-2773
Website : www.imagelaundrysystems.com Email : sales@imagelaundrysystems.com

Rev. 2026-001